
Omron · E2B

E2B-M12KS02-WP-B2 2M

Endüktif Sensör

E2B-M12KS02-WP-B2 2M, M12 gövdede 2 mm nominal algılama ile PNP NC çıkışı bir araya getirir. Normalde kapalı sinyal bekleyen kontrol girişlerinde NO modelden ayrı değerlendirilmelidir. Gömülebilir yapı ve 2 m kablo, metal braket içindeki konum algılama noktasını siparişe açık şekilde tanımlar.

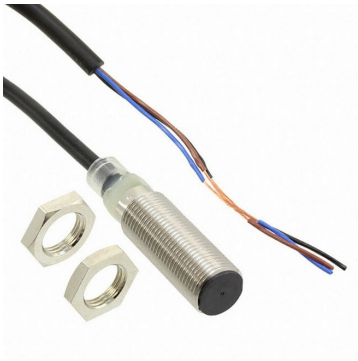

Resmî üretici seri/temsil görseli; modelin birebir ölçü veya etiket fotoğrafı olarak kullanılmamalıdır.

TEKNİK VERİLER

Gövde çapı	M12
Nominal algılama mesafesi	2 mm
Çıkış / çalışma	PNP NC
Montaj tipi	Gömülebilir
Kablo uzunluğu	2 m
Toplam boy	47 mm
Diş uzunluğu	30 mm
Koruma sınıfı	IP67

Algılama mesafesi nominaldir; hedef malzemesi, boyutu ve metal çevre etkileri kontrol edilir.

UYGULAMANIZ İÇİN SEÇİM

Kontrol programının NC sinyal mantığını beklediğini bağlantı şemasıyla doğrulayın.

B1 ve B2 kodları birbirinin yerine seçilebilir mi?

B1 NO, B2 NC çıkış mantığını belirtir; kontrol devresi doğrulanmadan değiştirilmemelidir.

TEKLİF TALEBİ

M12 KS02 NC için sinyal mantığınıza uygun sensör teklifi isteyin.

Resmî ürün kaydı · Üretici dokümanı


Automation tarafından resmî kaynaklarla hazırlanmıştır; üreticinin orijinal föyü değildir. Fiyat, stok ve termin teyit edilir.

Omron · E2B

E2B-M12KS02-WP-B2 2M

Inductive Sensor

E2B-M12KS02-WP-B2 2M combines 2 mm nominal sensing with PNP NC output in an M12 body. It should be assessed separately from NO models where the controller expects a normally closed signal. Flush mounting and a 2 m cable complete the position-sensing specification.

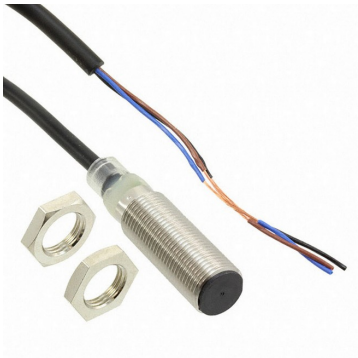

Official manufacturer family/representative visual; not an exact dimensional or nameplate photograph.

TECHNICAL DATA

Body size	M12
Nominal sensing distance	2 mm
Output / operation	PNP NC
Mounting type	Flush
Cable length	2 m
Overall length	47 mm
Thread length	30 mm
Ingress protection	IP67

Sensing distance is nominal; check target material, size and surrounding metal effects.

SELECTION FOR YOUR APPLICATION

Verify the expected NC logic against the control wiring and program.

Are B1 and B2 interchangeable designations?

B1 denotes NO and B2 NC operation; confirm the control circuit before changing between them.

REQUEST A QUOTATION

Request M12 KS02 NC matched to the signal logic.

Manufacturer product record · Manufacturer document

Automation summary based on official sources; not a manufacturer-issued datasheet. Price, stock and lead time require confirmation.