
# Yılmaz Redüktör MR272 Ayaklı Helisel Redüktör

**TEMEL MODEL / MR272**

MR272, M27 gövdesinde iki kademeli ve 35 mm mil çıkışlı bir modeldir. Ayaklı tahrikte kasnak veya zincir dişlisi kullanılacaksa yalnız çıkış torkuna bakılması yeterli olmaz; elemanın mil üzerindeki mesafesi radyal yük kontrolünü etkiler. Bu bilgileri baştan sunmanız, redüktör ve aktarım elemanlarının aynı çalışma koşullarına göre seçilmesine yardımcı olur.

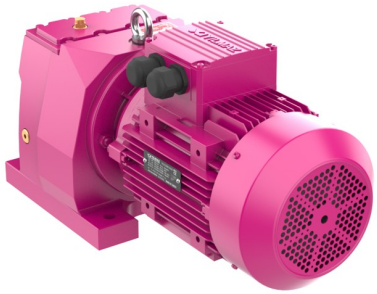

Resmî aile görseli

## Doğrulanmış teknik referanslar

| | |
|---|---|
| Model kodu | MR272 |
| Gövde grubu | M27 |
| Dişli yapısı | Helisel |
| Kademe | 2 |
| Giriş bağlantısı | Direkt motor akupleli; motor seçimi gerekli |
| Çıkış / montaj | Ayak bağlantılı, dolu mil |
| Standart çıkış mili çap/boy (mm) | Ø35/70 |
| Gövde grubu nominal torku (Nm, referans) | 450 |

Kasnak ya da dişlinin çapını, mil ucuna uzaklığını ve kayış/zincir düzenini bildirin.

**Kasnakla kullanımda hangi ek bilgi gerekir?**

Radyal kuvvet ve kuvvetin mil üzerindeki uygulama noktası belirlenmeli, katalog sınırlarıyla karşılaştırılmalıdır.


## MR272 teklifine mil yükü kontrolünü dahil edelim.

Temel model: tahvil, motor/giriş bağlantısı ve montaj pozisyonu teyit edilir. Gövde torku referanstır; seçili takımın çıkış değeri değildir. Görsel aileye aittir; boyut ve motor değişebilir.

# Yılmaz Redüktör MR272 Foot-Mounted Helical Gearmotor

## BASE MODEL / MR272

MR272 is a two-stage M27 model with a 35 mm solid output shaft. A pulley or sprocket introduces shaft loads that torque alone cannot describe. Providing the drive-element diameter and its position helps evaluate the gearbox and transmission components against the same operating conditions.

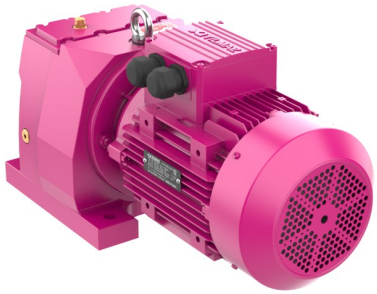

Official family visual

## Verified technical references

| | |
|---|---|
| Model code | MR272 |
| Housing group | M27 |
| Gear type | Helical |
| Stages | 2 |
| Input connection | Directly motor-coupled; motor selection required |
| Output / mounting | Foot mounted, solid output shaft |
| Standard output shaft diameter/length (mm) | Ø35/70 |
| Housing-group nominal torque (Nm, reference) | 450 |

Specify pulley or sprocket diameter, overhang and belt or chain arrangement.

**What additional information does a pulley drive need?**

Determine radial force and its point of application, then compare them with the manufacturer's limits.

## Include output-shaft load assessment in your MR272 enquiry.

Base model: ratio, motor/input interface and mounting position require confirmation. Housing torque is a reference, not a configured output rating. Family image; exact size and motor may differ.