
Yılmaz Redüktör MR373 Ayaklı Helisel Redüktör

TEMEL MODEL / MR373

MR373, ayak bağlantılı M37 gövdesinin üç kademeli motorlu seçeneğidir. Hız kontrol sürücüsüyle kullanılacak bir sistemde yalnız nominal çalışma noktası değil, en düşük sürekli devir de paylaşılmalıdır. Motor soğutması ve redüktörün yük koşulları bu aralıkta ayrı değerlendirilerek hız ayarı ihtiyacına uygun bir tahrik paketi oluşturulabilir.

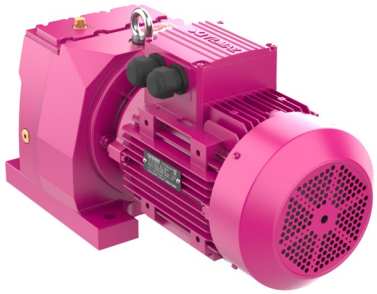

Resmî aile görseli

Doğrulanmış teknik referanslar

Model kodu	MR373
Gövde grubu	M37
Dişli yapısı	Helisel
Kademe	3
Giriş bağlantısı	Direkt motor akupleli; motor seçimi gerekli
Çıkış / montaj	Ayak bağlantılı, dolu mil
Standart çıkış mili çap/boy (mm)	Ø40/80
Gövde grubu nominal torku (Nm, referans)	820

Sürücüyle çalışılacak minimum ve maksimum devirleri, bu devirlerdeki yüklerle birlikte verin.

İnvertör kullanımı soğutma kontrolünü kaldırır mı?

Hayır. Düşük motor devrinde soğutma yeterliliği incelenir; bağımsız fan ihtiyacı uygulamaya göre belirlenir.


MR373 için hız aralığınıza uygun motor opsiyonlarını değerlendirelim.

Temel model: tahvil, motor/giriş bağlantısı ve montaj pozisyonu teyit edilir. Gövde torku referanstır; seçili takımın çıkış değeri değildir. Görsel aileye aittir; boyut ve motor değişebilir.

Yılmaz Redüktör MR373 Foot-Mounted Helical Gearmotor

BASE MODEL / MR373

MR373 is the three-stage motorised option for the foot-mounted M37 housing. For variable-speed operation, specify the lowest continuous speed as well as the nominal operating point. Motor cooling and gearbox duty should be assessed across that range before selecting the drive package.

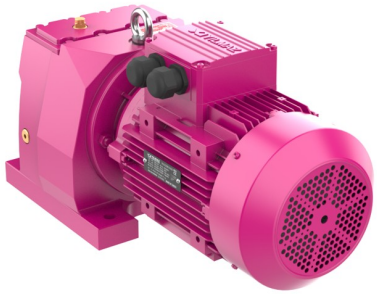

Official family visual

Verified technical references

Model code	MR373
Housing group	M37
Gear type	Helical
Stages	3
Input connection	Directly motor-coupled; motor selection required
Output / mounting	Foot mounted, solid output shaft
Standard output shaft diameter/length (mm)	Ø40/80
Housing-group nominal torque (Nm, reference)	820

Provide minimum and maximum speeds and the load at each point.

Does an inverter remove the need to check cooling?

No. Cooling at low motor speed must be assessed; a separate fan may be required by the application.

Review motor options for your MR373 speed range.

Base model: ratio, motor/input interface and mounting position require confirmation. Housing torque is a reference, not a configured output rating. Family image; exact size and motor may differ.

Official product · KKMCE0301-0926 / pages 5, 29