
Yılmaz Redüktör MR473 Ayaklı Helisel Redüktör

TEMEL MODEL / MR473

MR473, M47 gövde grubunda üç kademeli bir ayaklı redüktör modelidir. Kararlı çalışan bir hattın yanında periyodik sıkışma veya darbe yaşayan mekanizmalarda ihtiyaçlar farklılaşır. Gövde tablosunda yer alan 1.550 Nm referansını doğrudan çalışma torku kabul etmek yerine yük değişimini tarif ederek servis faktörü değerlendirmesine temel sağlayabilirsiniz.

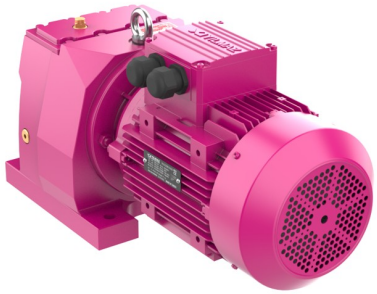

Resmî aile görseli

Doğrulanmış teknik referanslar

Model kodu	MR473
Gövde grubu	M47
Dişli yapısı	Helisel
Kademe	3
Giriş bağlantısı	Direkt motor akupleli; motor seçimi gerekli
Çıkış / montaj	Ayak bağlantılı, dolu mil
Standart çıkış mili çap/boy (mm)	Ø50/100
Gövde grubu nominal torku (Nm, referans)	1.550

Normal yükü ve kısa süreli en yüksek yükü ayrı ayrı belirtin.

Nominal gövde torku tepe yük sınırı mıdır?

Aynı kavram değildir. Geçici yükler süreleri ve tekrarlarıyla birlikte üretici seçim kurallarına göre incelenir.


MR473 teklifinde sürekli yük ve tepe yükü birlikte değerlendirelim.

Temel model: tahvil, motor/giriş bağlantısı ve montaj pozisyonu teyit edilir. Gövde torku referanstır; seçili takımın çıkış değeri değildir. Görsel aileye aittir; boyut ve motor değişebilir.

Yılmaz Redüktör MR473 Foot-Mounted Helical Gearmotor

BASE MODEL / MR473

MR473 is a three-stage foot-mounted model in the M47 group. A steady production line and a mechanism with occasional shocks require different selection inputs. Treat the published 1,550 Nm housing figure as a reference and describe load variation so service-factor assessment reflects the actual process.

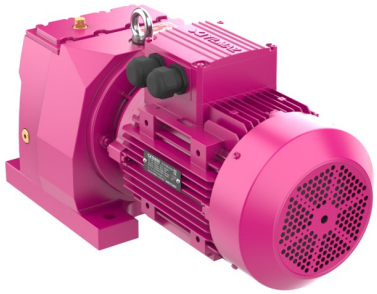

Official family visual

Verified technical references

Model code	MR473
Housing group	M47
Gear type	Helical
Stages	3
Input connection	Directly motor-coupled; motor selection required
Output / mounting	Foot mounted, solid output shaft
Standard output shaft diameter/length (mm)	Ø50/100
Housing-group nominal torque (Nm, reference)	1550

State normal load and short-duration peak load separately.

Is nominal housing torque a peak-load limit?

They are different concepts. Transient loads require assessment of duration and repetition against selection rules.

Evaluate continuous and peak loading in your MR473 proposal.

Base model: ratio, motor/input interface and mounting position require confirmation. Housing torque is a reference, not a configured output rating. Family image; exact size and motor may differ.

Official product · KKMCE0301-0926 / pages 5, 29